



PARAMETERS

Pixel Pitch	P1.25	P1.5625	P1.95	P2.5	P2.604	P2.976	P3.91
LED Type	SMD1010(GOB)	SMD1212(GOB)	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020
Physical density(Dot/sqm)	640000	409600	262144	160000	147456	112896	65536
Module resolution	200x200	160X160	128X128	100X100	96X96	84X84	64X64
Module dimension(mm)	250X250	250X250	250X250	250X250	250X250	250X250	250X250
Panel size(mm)	1000x250x33mm / 1000x500x33mm / 750x250x33mm / 500x250x33mm						
Module quantity(WXH)	4X2/4X1/3X1/2X1						
Panel resolution	800x400/800x200 600x200/400x200	640x320/640x160 480x160/320x160	512x256/512x128 384x128/256x128	400x200/400x100 300x100/200x100	384x192/384x96 288x96/192x96	336x168/336x84 252x84/168x84	256x128/256x64 192x64/128x64
Maintenance	Front access	Front access	Front access	Front access	Front access	Front access	Front access
Cabinet material	Die cast aluminum	Die cast aluminum	Die cast aluminum	Die cast aluminum	Die cast aluminum	Die cast aluminum	Die cast aluminum
Single point brightness correction	Have	Have	Have	Have	Have	Have	Have
Brightness(Nits)	600	600	800	800	800	800	1000
Color temperature(K)	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Brightness/Color uniformity	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%
Contrast	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame frequency	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/50 scan	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan
Gray level	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional
Refresh rate(Hz)	7680	7680	7680	7680	7680	7680	7680
Max. power consumption(W/sqm)	350	350	350	350	350	350	350
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200	100-200	100-200
Protection level	IP31	IP31	IP31	IP31	IP31	IP31	IP31
Power input	AC90-264V,47-63Hz						
Working temperature/humidity(°C/RH)	-20~60 °C/10%~85%						
Storage temperature/humidity(°C/RH)	-20~60 °C/10%~85%						
Certification	CCC/CE/RoHS/FCC/CB/TUV/IEC						

SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

Tel: 0086-755-28748997


WhatsApp: +86 13927480630

Web : <http://www.hanmeigrp.com>

Email: info@hanmeigrp.com

ULTRA PRO Series

Indoor fixed installation

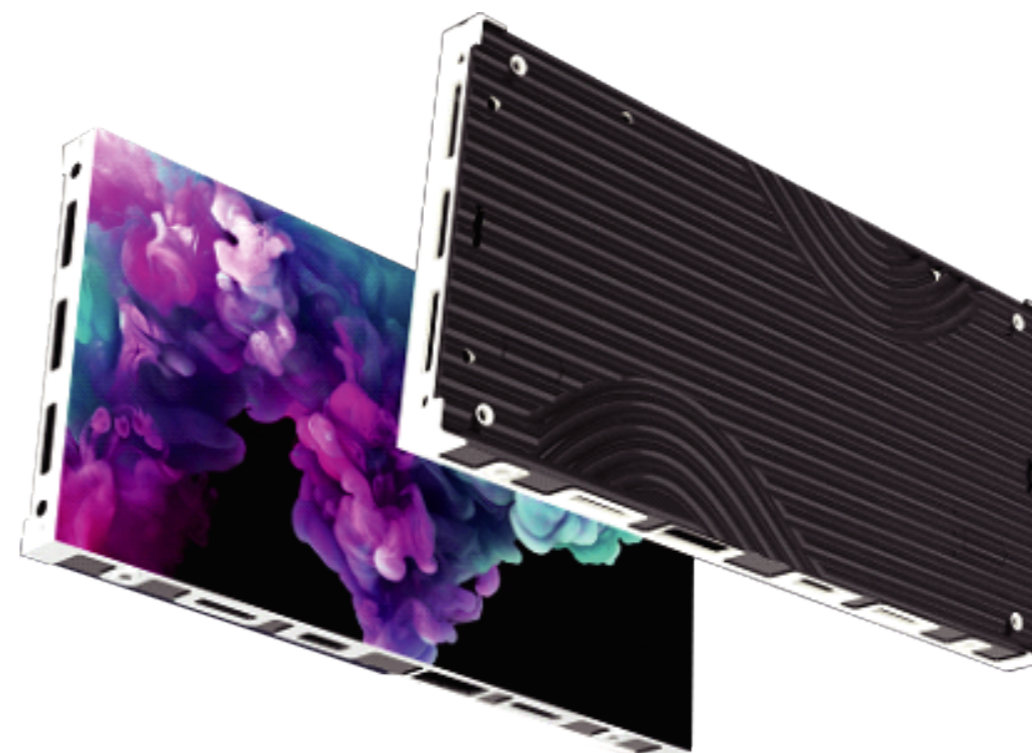


SHENZHEN HANMEI PHOTOELECTRIC CO.,LTD

SHOWING THE BEAUTY OF THE WORLD

Cabinet weight


Die cast aluminum integrated box body, high precision, with a total thickness of only 33mm. The weights of the four types of boxes, 1000X500mm/1000X250mm/750X250mm/500X250mm, are as follows:9.8kg/5.0kg/4.0kg/3.0kg

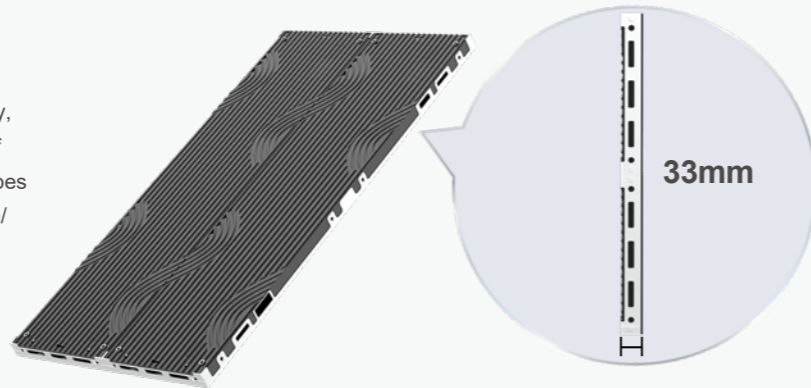

Product Details


Integrated power signal quick plug interface reduces internal wiring work in the box, making installation faster.

The box is made of high-precision die-casting material, with integrated molding, positioning columns, eagle hook locks (screws that cannot be loosened), reinforcement ribs and other details designed for higher flatness. Effectively improve installation efficiency and enhance customer experience.

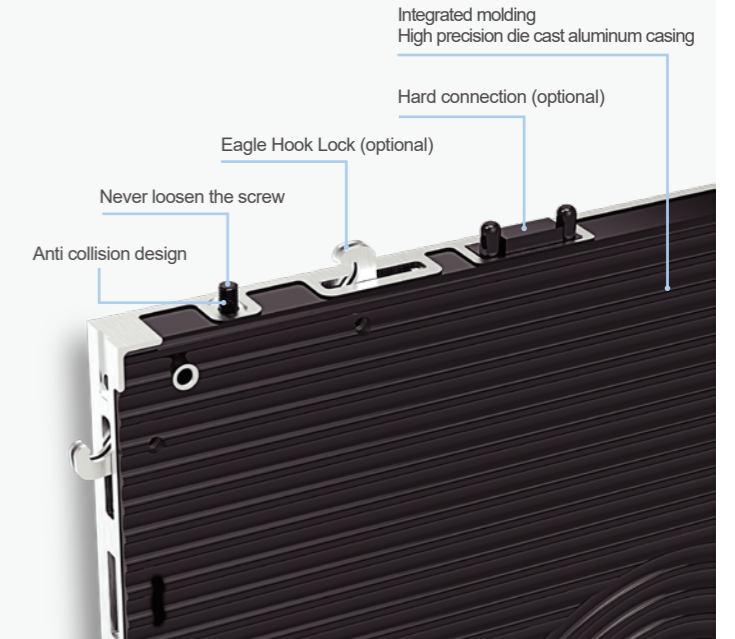


Pre installation and maintenance

Support pre installation and maintenance, with zero space constraints

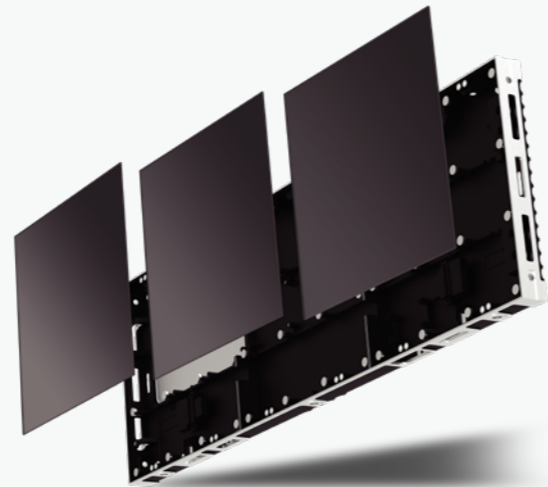

Creative splicing, infinite imagination


Supports shapes such as right angles and columns to meet various creative splicing needs.

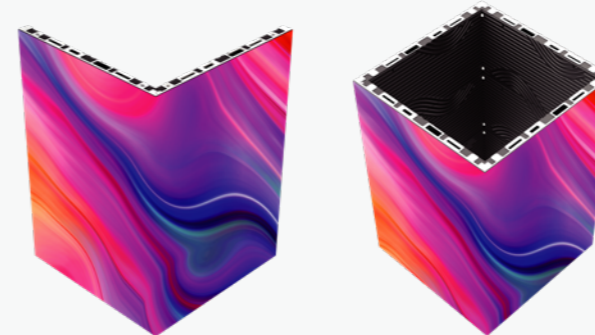

Innovative module

The innovative design of the module ensures that the viewing angle of the light beads is not affected when rotating the module direction. Impact, there will be no color difference. Not only does it improve the visual comfort, but it also enhances the visual effect. The attractiveness of fruit.

The module is hard connected to the box, and the module adopts magnetic suction automatic adsorption, which is reliable and does not fall off.

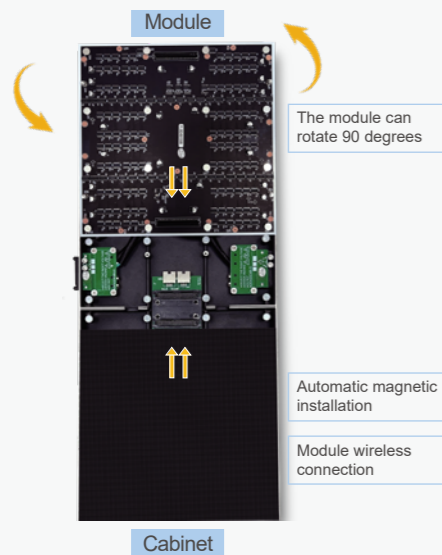

Installation mode

Support multiple installation methods such as lifting, wall mounted installation, and column shaped installation, suitable for more scenarios.



Hanging



Wall mounting



Variety of shapes